

NUBXXXXX SERIES

NEW UTILITY BOX



PRODUCT INFORMATION

MATERIAL: High impact UL94-HB, ABS.

FEATURES:

- Ideally designed for small printed circuit board use or used as potting box.
- Snap fit cover with the base of design is easy for assembly.
- langed base with mounting holes for customer to do the wall mounting easily.
- Cable outlet are designed in the cover , easily use the cutter to open.
- Durable UL94-V0 rating of abs or polycarbonate are available upon request.
- Four different colors for selection -----



NUBXXXXXBK SERIES
Color: Black (Pantone Black U)



NUBXXXXXWH SERIES
Color: White (RAL9002)



NUBXXXXXOR SERIES
Color: Orange (Pantone 165C)



NUBXXXXXRD SERIES
Color: Red (Pantone 186C)

NUBXXXXXBK, NUBXXXXXWH SERIES

NUBXXXXXBK SERIES (Color: Black)



ITEM No.	COLOR	MATERIAL	EXTERNAL DIMENSION(mm)			Suitable cable diameter in mm for use in the cable outlet
			LENGTH	WIDTH	HEIGHT	
NUB503522BK	Black	ABS, UL94-HB	50	35.4	22	2 CORE , 3 MM
NUB505017BK	Black	ABS, UL94-HB	50	50.4	17	2 CORE , 3 MM
NUB505027BK	Black	ABS, UL94-HB	50	50.4	27	2 CORE , 3 MM
NUB705017BK	Black	ABS, UL94-HB	70	50.4	17	2 CORE , 3 MM
NUB705029BK	Black	ABS, UL94-HB	70	50.4	29.5	2 CORE , 3 MM
NUB705042BK	Black	ABS, UL94-HB	70	50.4	42	2 CORE , 3 MM
NUB808023BK	Black	ABS, UL94-HB	80	80.6	23.5	2 CORE , 3 MM
NUB808043BK	Black	ABS, UL94-HB	80	80.6	43.5	2 CORE , 6 MM
NUB904527BK	Black	ABS, UL94-HB	90	45.6	27.5	2 CORE , 6 MM
NUB1057020BK	Black	ABS, UL94-HB	105	70.6	20.5	2 CORE , 6 MM
NUB1057035BK	Black	ABS, UL94-HB	105	70.6	35.5	2 CORE , 6 MM
NUB1057050BK	Black	ABS, UL94-HB	105	70.6	50.5	2 CORE , 6 MM


NUBXXXXXWH SERIES (Color: White)



ITEM No.	COLOR	MATERIAL	EXTERNAL DIMENSION(mm)			Suitable cable diameter in mm for use in the cable outlet
			LENGTH	WIDTH	HEIGHT	
NUB503522WH	White	ABS, UL94-HB	50	35.4	22	2 CORE , 3 MM
NUB505017WH	White	ABS, UL94-HB	50	50.4	17	2 CORE , 3 MM
NUB505027WH	White	ABS, UL94-HB	50	50.4	27	2 CORE , 3 MM
NUB705017WH	White	ABS, UL94-HB	70	50.4	17	2 CORE , 3 MM
NUB705029WH	White	ABS, UL94-HB	70	50.4	29.5	2 CORE , 3 MM
NUB705042WH	White	ABS, UL94-HB	70	50.4	42	2 CORE , 3 MM
NUB808023WH	White	ABS, UL94-HB	80	80.6	23.5	2 CORE , 3 MM
NUB808043WH	White	ABS, UL94-HB	80	80.6	43.5	2 CORE , 6 MM
NUB904527WH	White	ABS, UL94-HB	90	45.6	27.5	2 CORE , 6 MM
NUB1057020WH	White	ABS, UL94-HB	105	70.6	20.5	2 CORE , 6 MM
NUB1057035WH	White	ABS, UL94-HB	105	70.6	35.5	2 CORE , 6 MM
NUB1057050WH	White	ABS, UL94-HB	105	70.6	50.5	2 CORE , 6 MM

NUBXXXXXOR, NUBXXXXXRD SERIES

NUBXXXXXOR SERIES (Color: Orange)

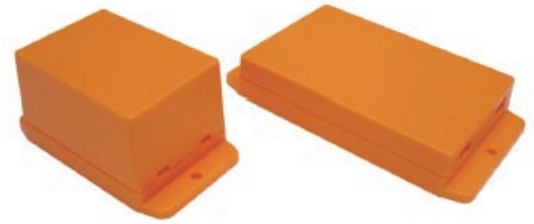

ITEM No.	COLOR	MATERIAL	EXTERNAL DIMENSION(mm)			Suitable cable diameter in mm for use in the cable outlet
			LENGTH	WIDTH	HEIGHT	
NUB503522OR	Orange	ABS, UL94-HB	50	35.4	22	2 CORE , 3 MM
NUB505017OR	Orange	ABS, UL94-HB	50	50.4	17	2 CORE , 3 MM
NUB505027OR	Orange	ABS, UL94-HB	50	50.4	27	2 CORE , 3 MM
NUB705017OR	Orange	ABS, UL94-HB	70	50.4	17	2 CORE , 3 MM
NUB705029OR	Orange	ABS, UL94-HB	70	50.4	29.5	2 CORE , 3 MM
NUB705042OR	Orange	ABS, UL94-HB	70	50.4	42	2 CORE , 3 MM
NUB808023OR	Orange	ABS, UL94-HB	80	80.6	23.5	2 CORE , 3 MM
NUB808043OR	Orange	ABS, UL94-HB	80	80.6	43.5	2 CORE , 6 MM
NUB904527OR	Orange	ABS, UL94-HB	90	45.6	27.5	2 CORE , 6 MM
NUB1057020OR	Orange	ABS, UL94-HB	105	70.6	20.5	2 CORE , 6 MM
NUB1057035OR	Orange	ABS, UL94-HB	105	70.6	35.5	2 CORE , 6 MM
NUB1057050OR	Orange	ABS, UL94-HB	105	70.6	50.5	2 CORE , 6 MM

NUBXXXXXRD SERIES (Color: Red)





ITEM No.	COLOR	MATERIAL	EXTERNAL DIMENSION(mm)			Suitable cable diameter in mm for use in the cable outlet
			LENGTH	WIDTH	HEIGHT	
NUB503522RD	Red	ABS, UL94-HB	50	35.4	22	2 CORE , 3 MM
NUB505017RD	Red	ABS, UL94-HB	50	50.4	17	2 CORE , 3 MM
NUB505027RD	Red	ABS, UL94-HB	50	50.4	27	2 CORE , 3 MM
NUB705017RD	Red	ABS, UL94-HB	70	50.4	17	2 CORE , 3 MM
NUB705029RD	Red	ABS, UL94-HB	70	50.4	29.5	2 CORE , 3 MM
NUB705042RD	Red	ABS, UL94-HB	70	50.4	42	2 CORE , 3 MM
NUB808023RD	Red	ABS, UL94-HB	80	80.6	23.5	2 CORE , 3 MM
NUB808043RD	Red	ABS, UL94-HB	80	80.6	43.5	2 CORE , 6 MM
NUB904527RD	Red	ABS, UL94-HB	90	45.6	27.5	2 CORE , 6 MM
NUB1057020RD	Red	ABS, UL94-HB	105	70.6	20.5	2 CORE , 6 MM
NUB1057035RD	Red	ABS, UL94-HB	105	70.6	35.5	2 CORE , 6 MM
NUB1057050RD	Red	ABS, UL94-HB	105	70.6	50.5	2 CORE , 6 MM

How to well cut the cable outlet

Hole dimension of the cable outlet (mm)

ITEM No.	A	B	Suitable cable diameter in mm for use in the cable outlet
NUB503522XX SERIES	6 mm	3 mm	2 CORE, 3 MM
NUB505017XX SERIES	6 mm	3 mm	2 CORE, 3 MM
NUB505027XX SERIES	6 mm	3 mm	2 CORE, 3 MM
NUB705017XX SERIES	6 mm	3 mm	2 CORE, 3 MM
NUB705029XX SERIES	6 mm	3 mm	2 CORE, 3 MM
NUB904527XX SERIES	6 mm	3 mm	2 CORE, 3 MM
NUB705042XX SERIES	6 mm	3 mm	2 CORE, 3 MM
NUB1057020XX SERIES	12 mm	6 mm	2 CORE, 6 MM
NUB1057035XX SERIES	12 mm	6 mm	2 CORE, 6 MM
NUB1057050XX SERIES	12 mm	6 mm	2 CORE, 6 MM
NUB808023XX SERIES	12 mm	6 mm	2 CORE, 6 MM
NUB808043XX SERIES	12 mm	6 mm	2 CORE, 6 MM

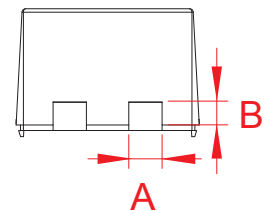

1. Select a suitable cable cutter



2. Press the “o” position of the cover , and open the box.



3. Use the cutter to cut one side of cable outlet



4. Cut another side of cable outlet




5. Use the finger to bend additional material of the cable outlet




6. Done


NUB503522BK/NUB503522WH/NUB503522OR/NUB503522RD

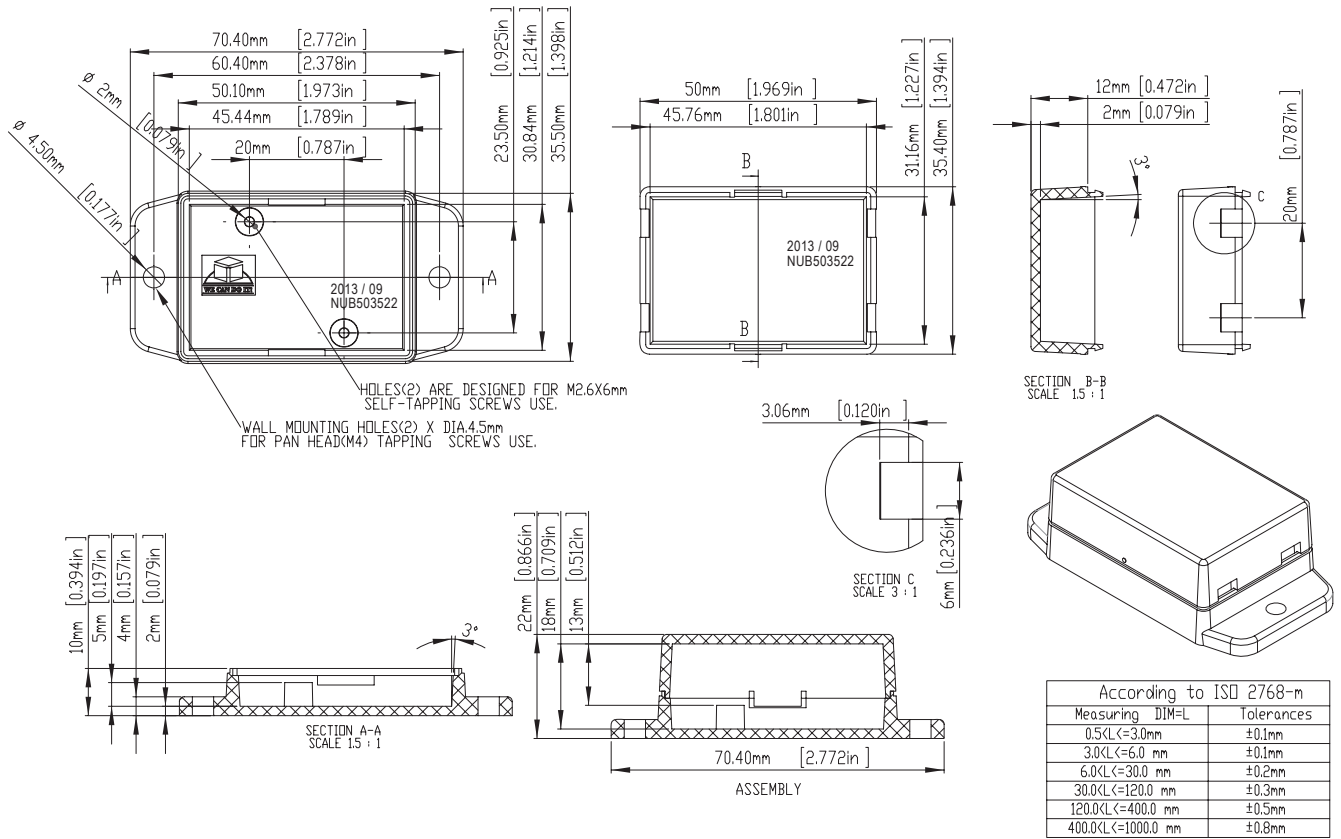


NUB505017BK/NUB505017WH/NUB505017OR/NUB505017RD

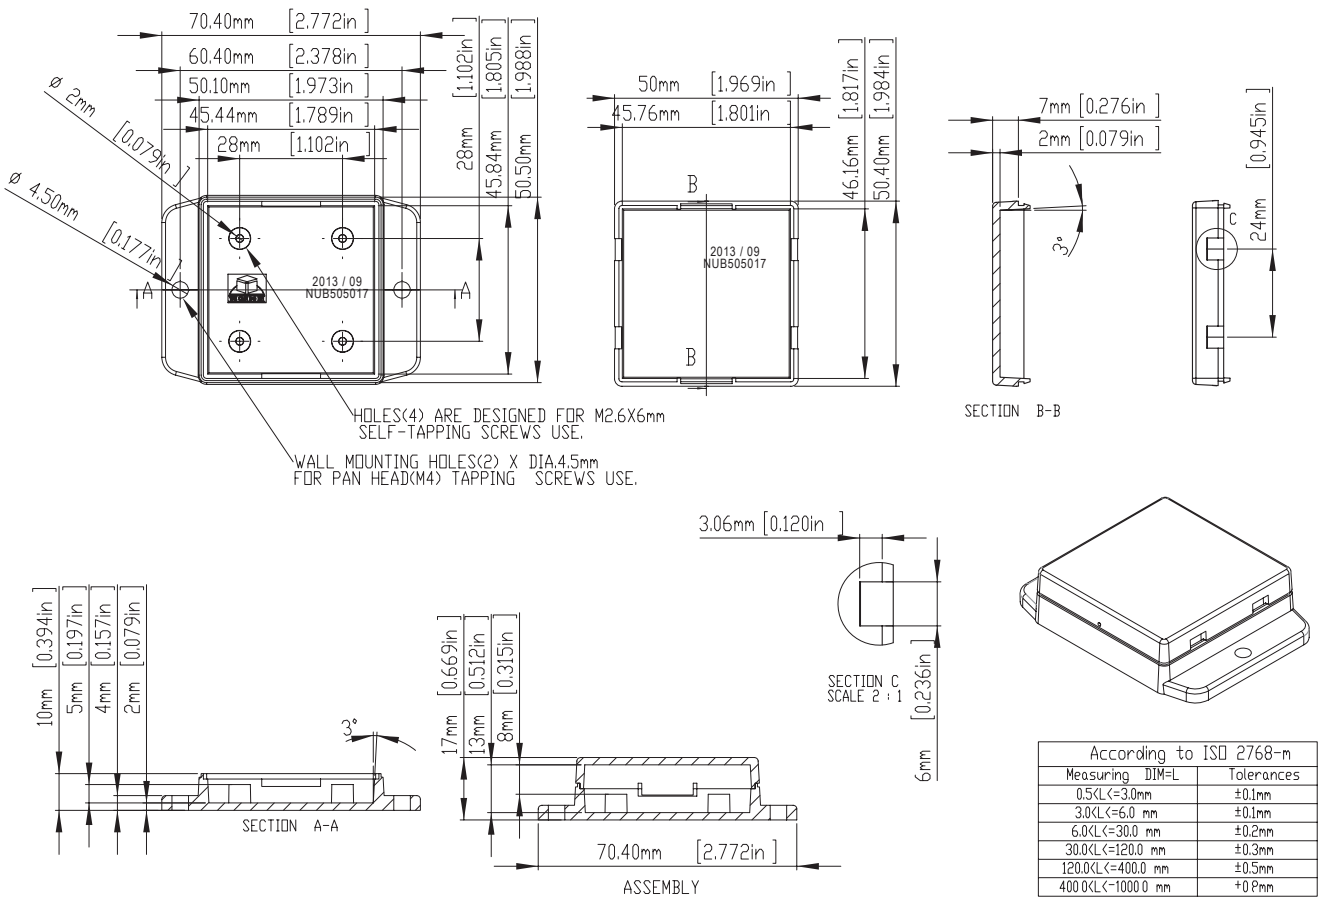


NUB505027BK/NUB505027WH/NUB505027OR/NUB505027RD

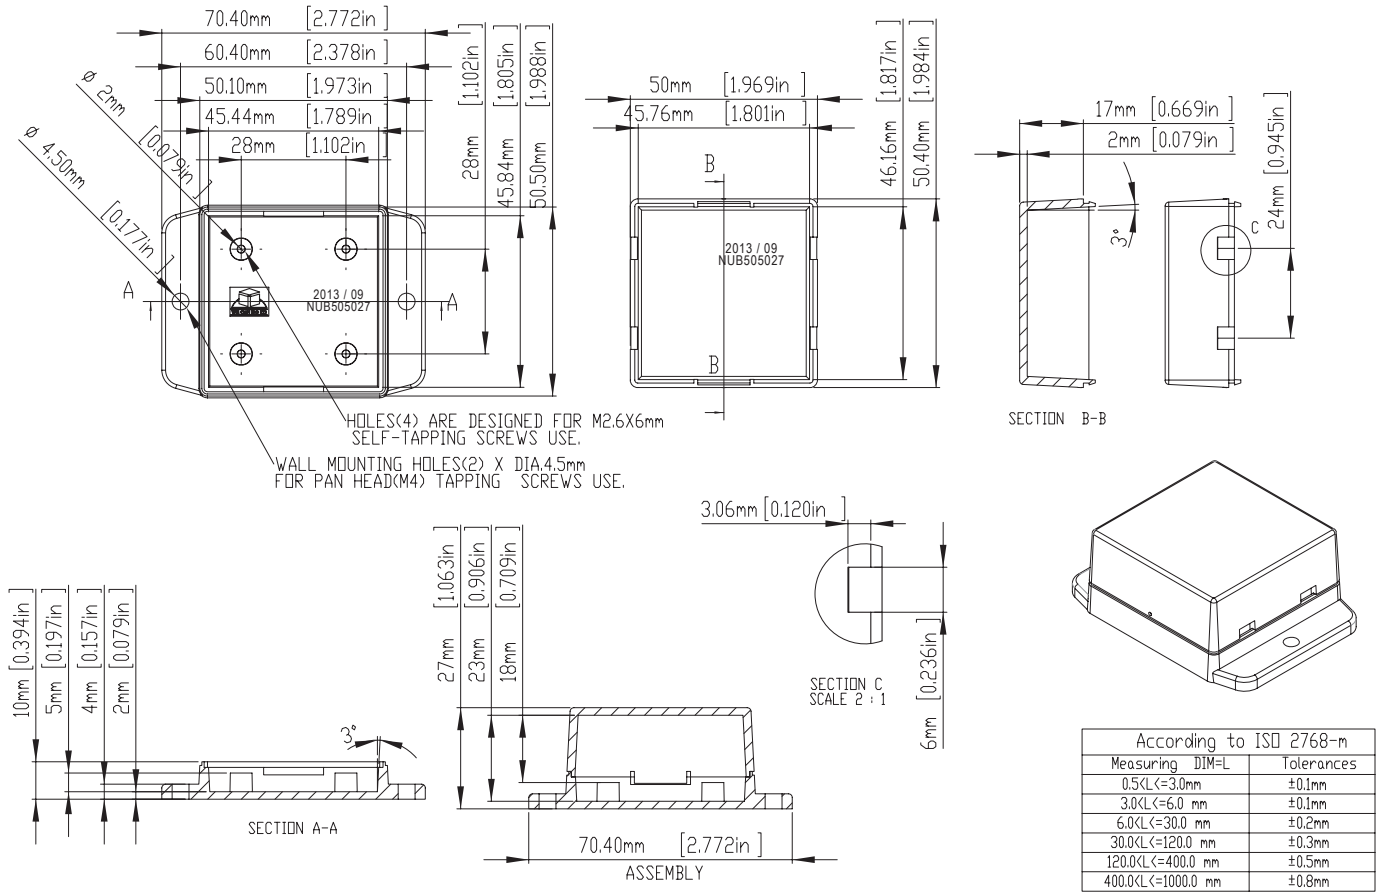


NUB705017BK/NUB705017WH/NUB705017OR/NUB705017RD

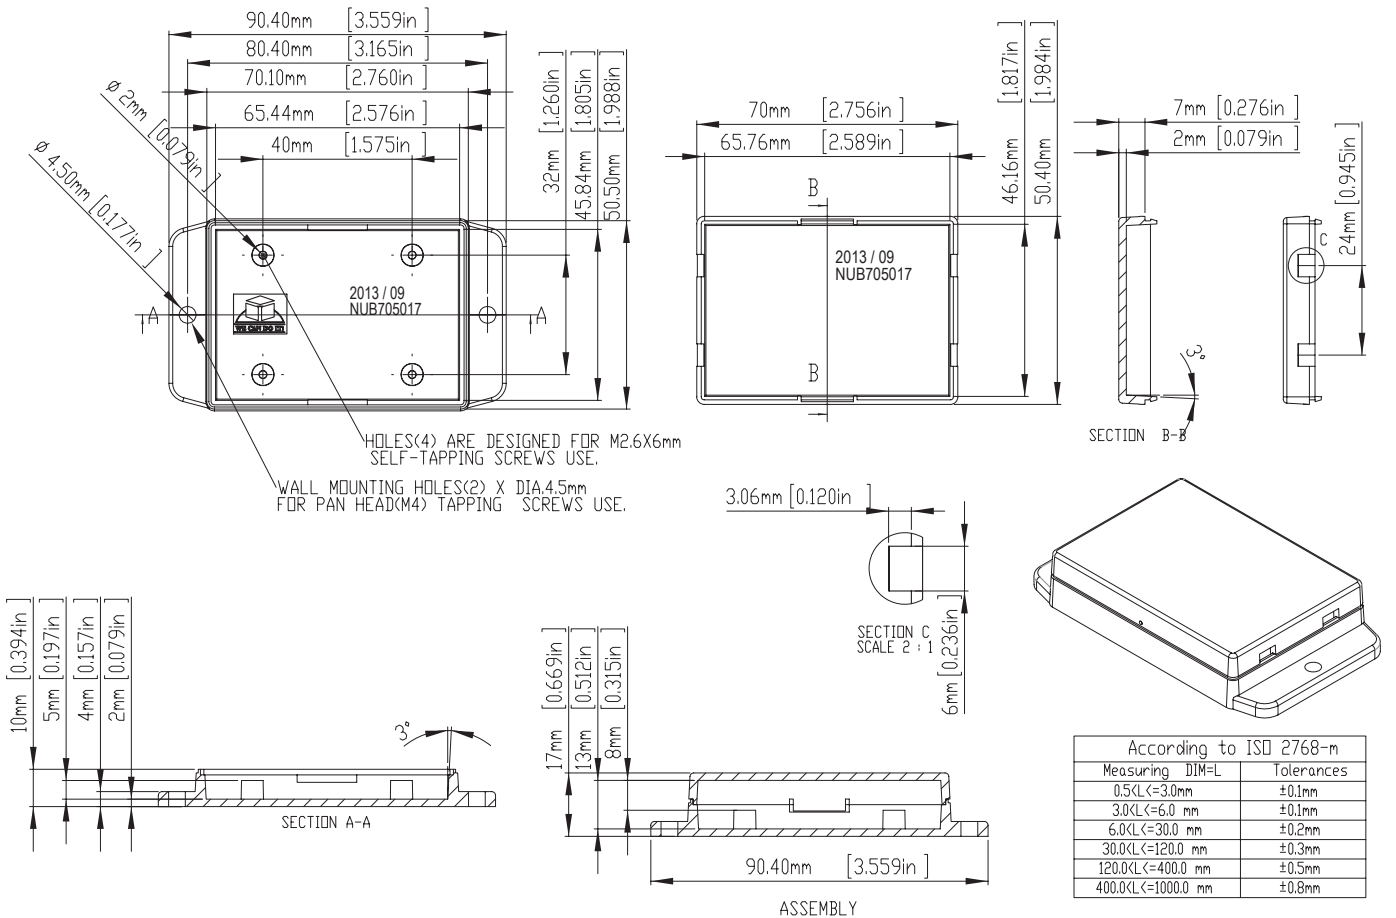


NUB705029BK/NUB705029WH/NUB705029OR/NUB705029RD

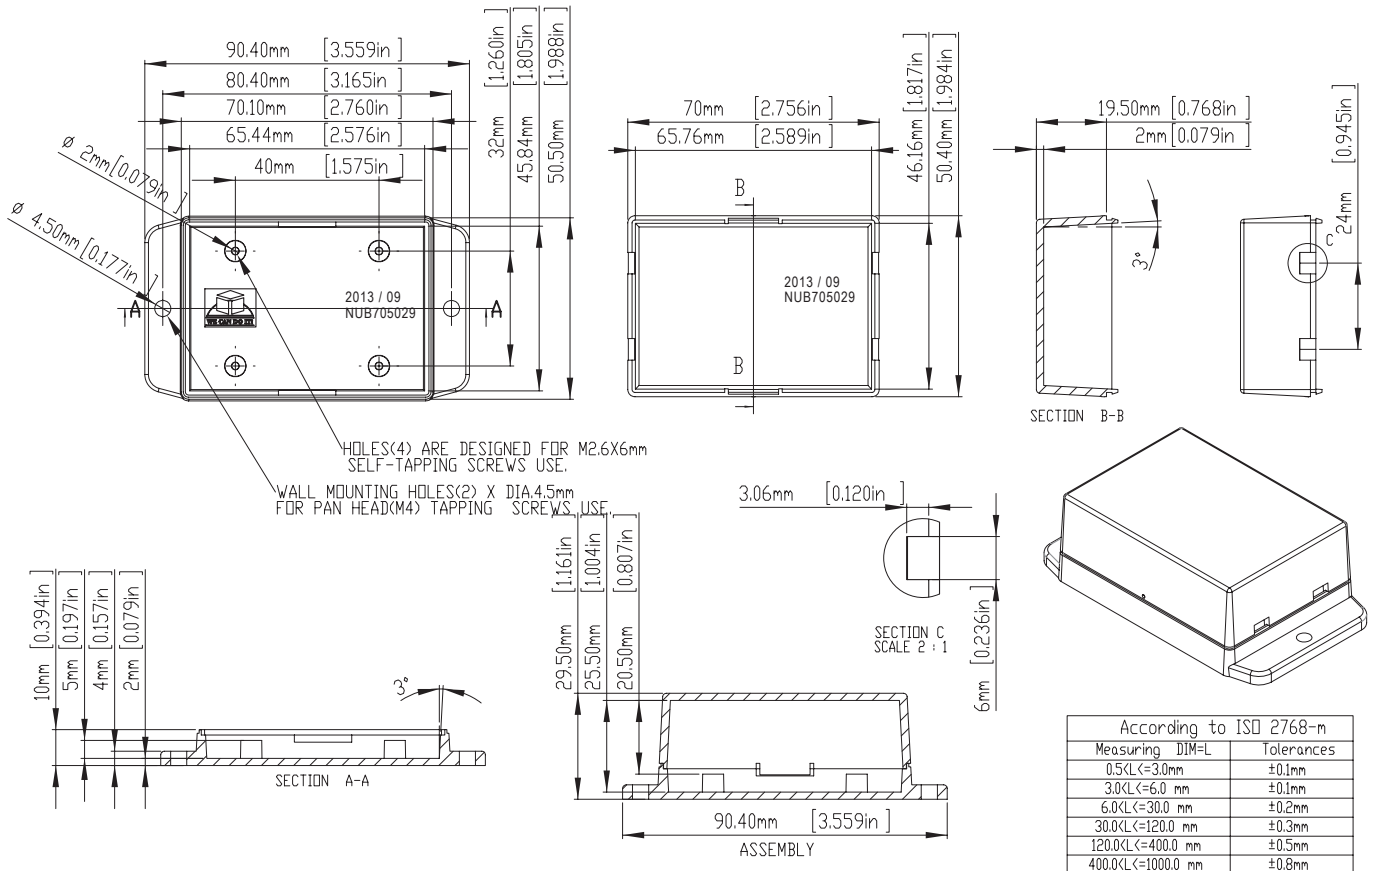


NUB705042BK/NUB705042WH/NUB705042OR/NUB705042RD

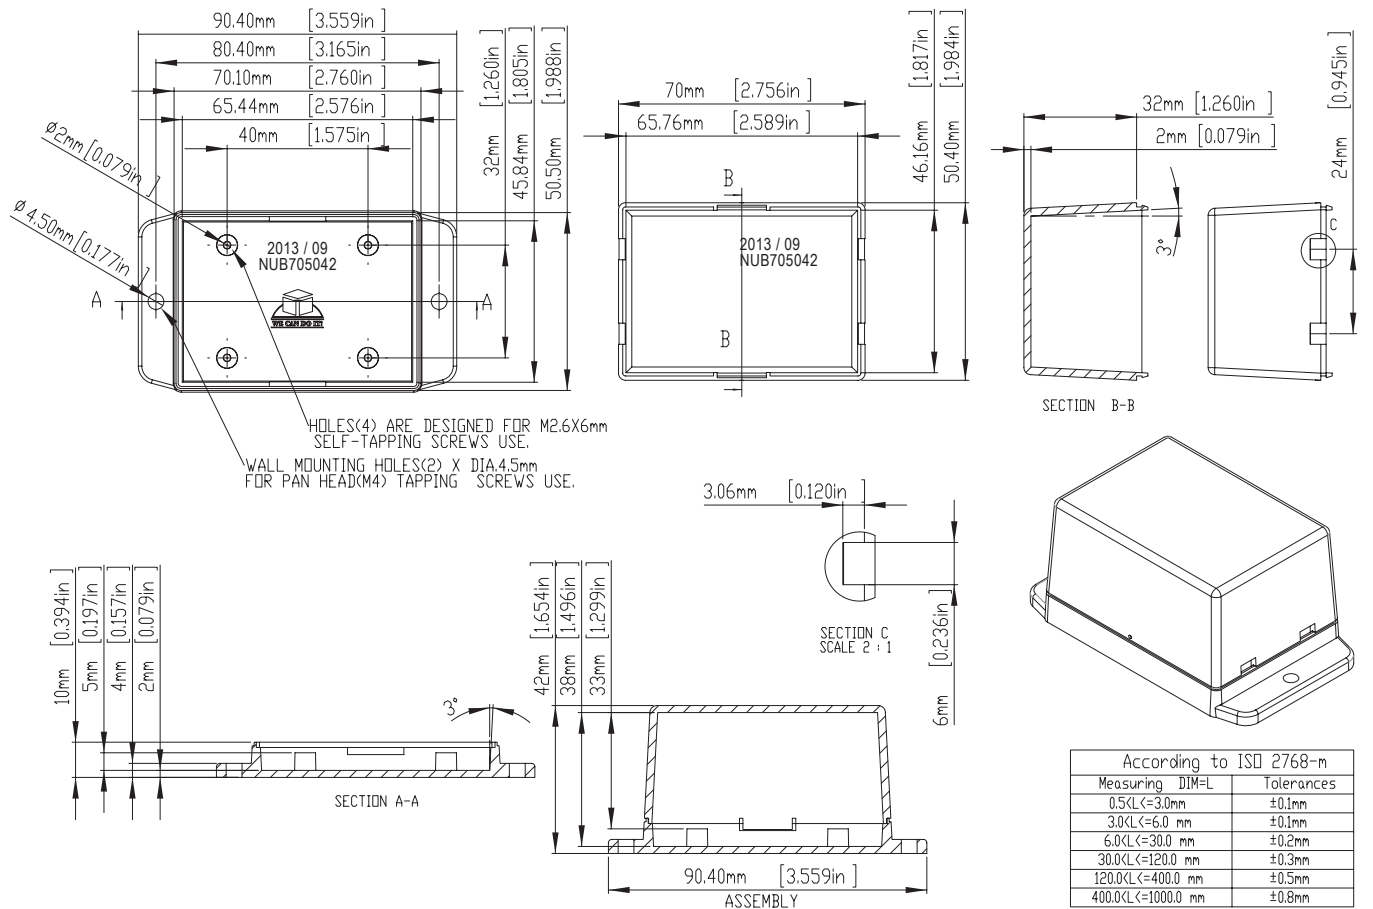


NUB808023BK/NUB808023WH/NUB808023OR/NUB808023RD

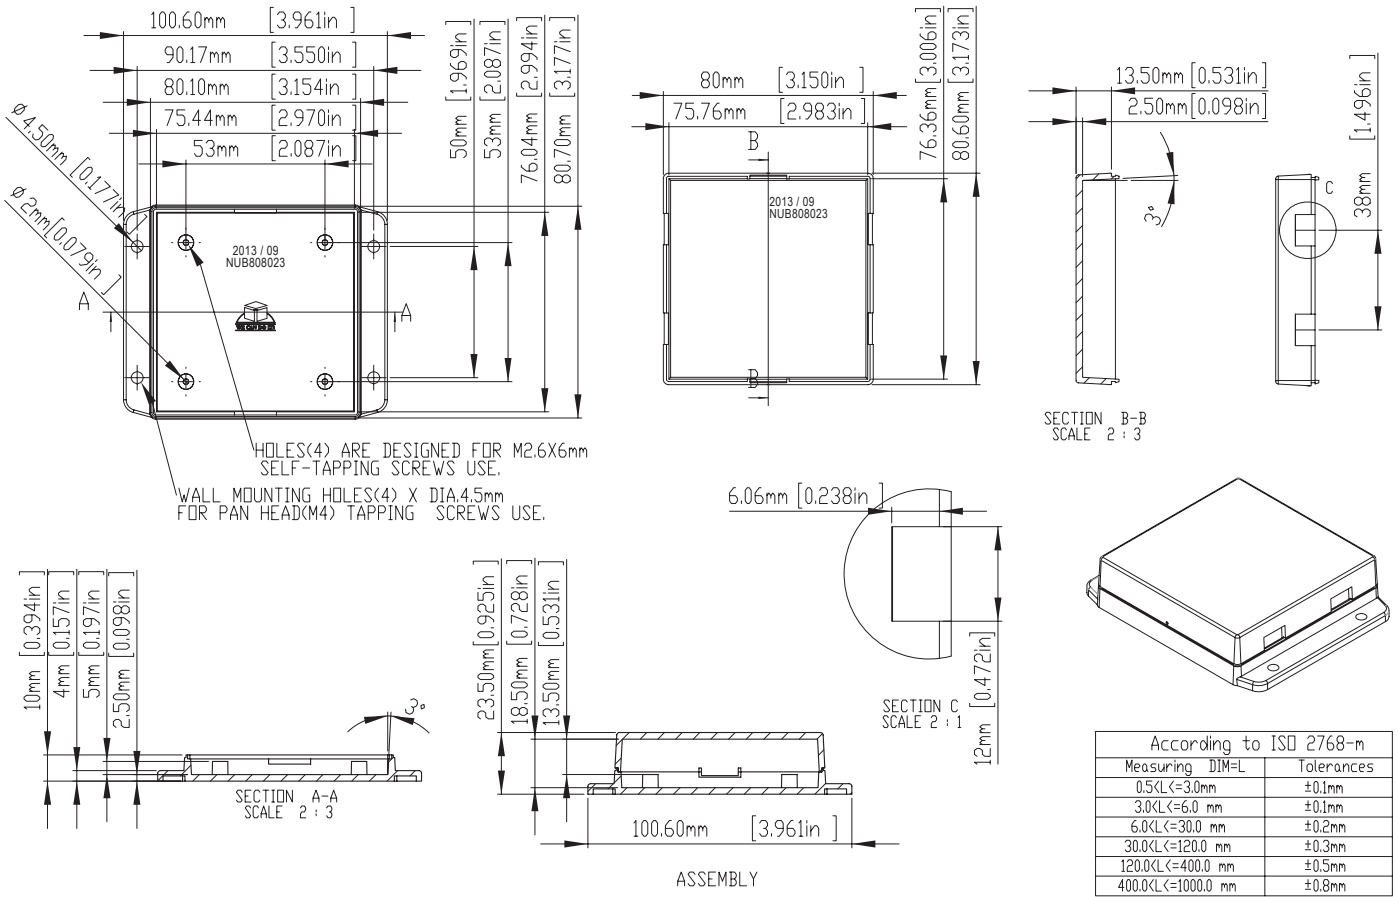


NUB808043BK/NUB808043WH/NUB808043OR/NUB808043RD

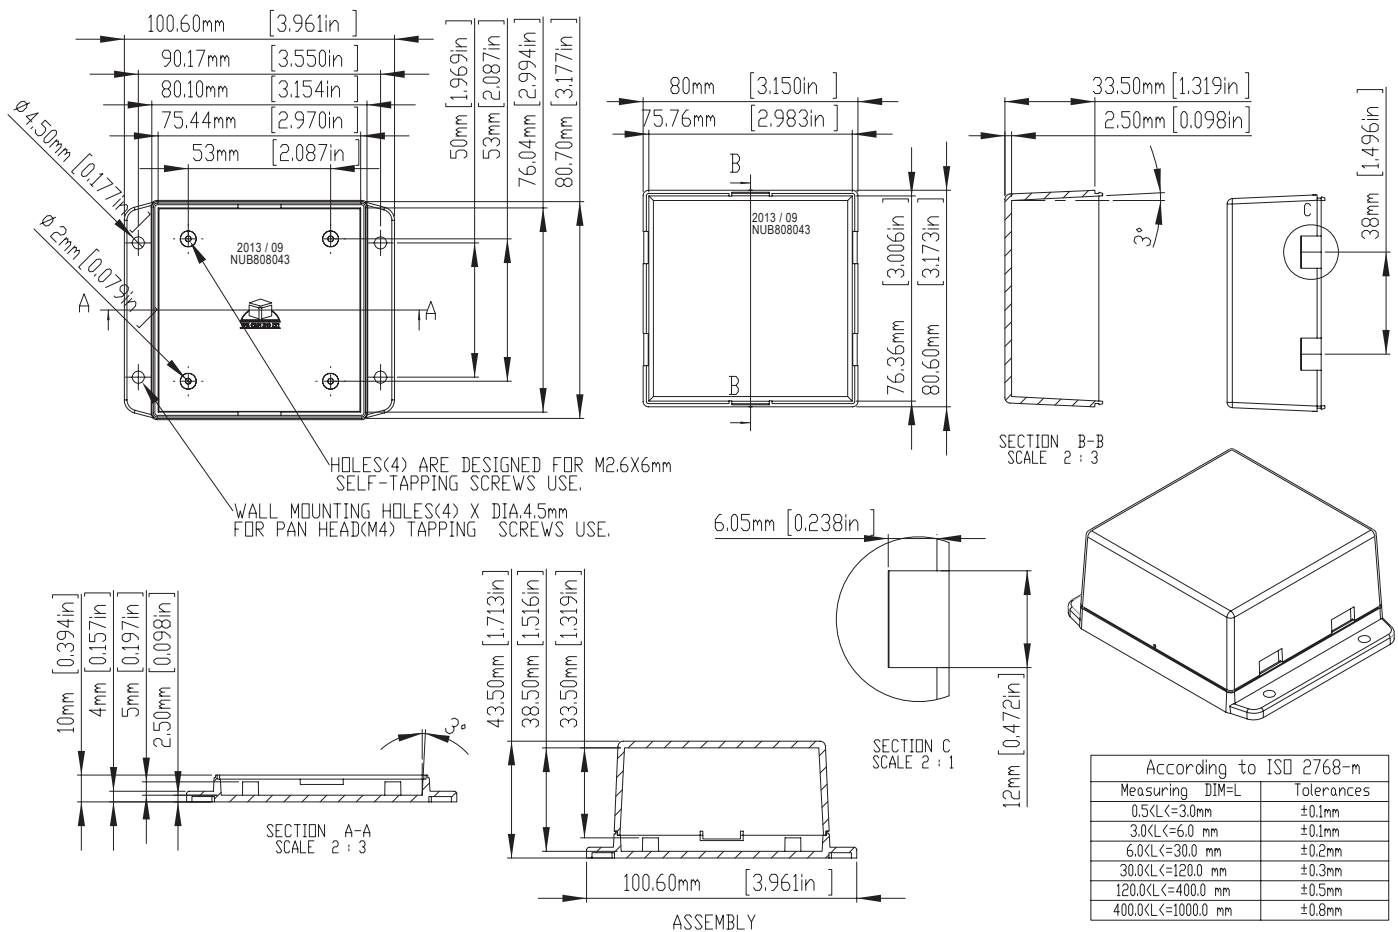


NUB904527BK/NUB904527WH/NUB904527OR/NUB904527RD

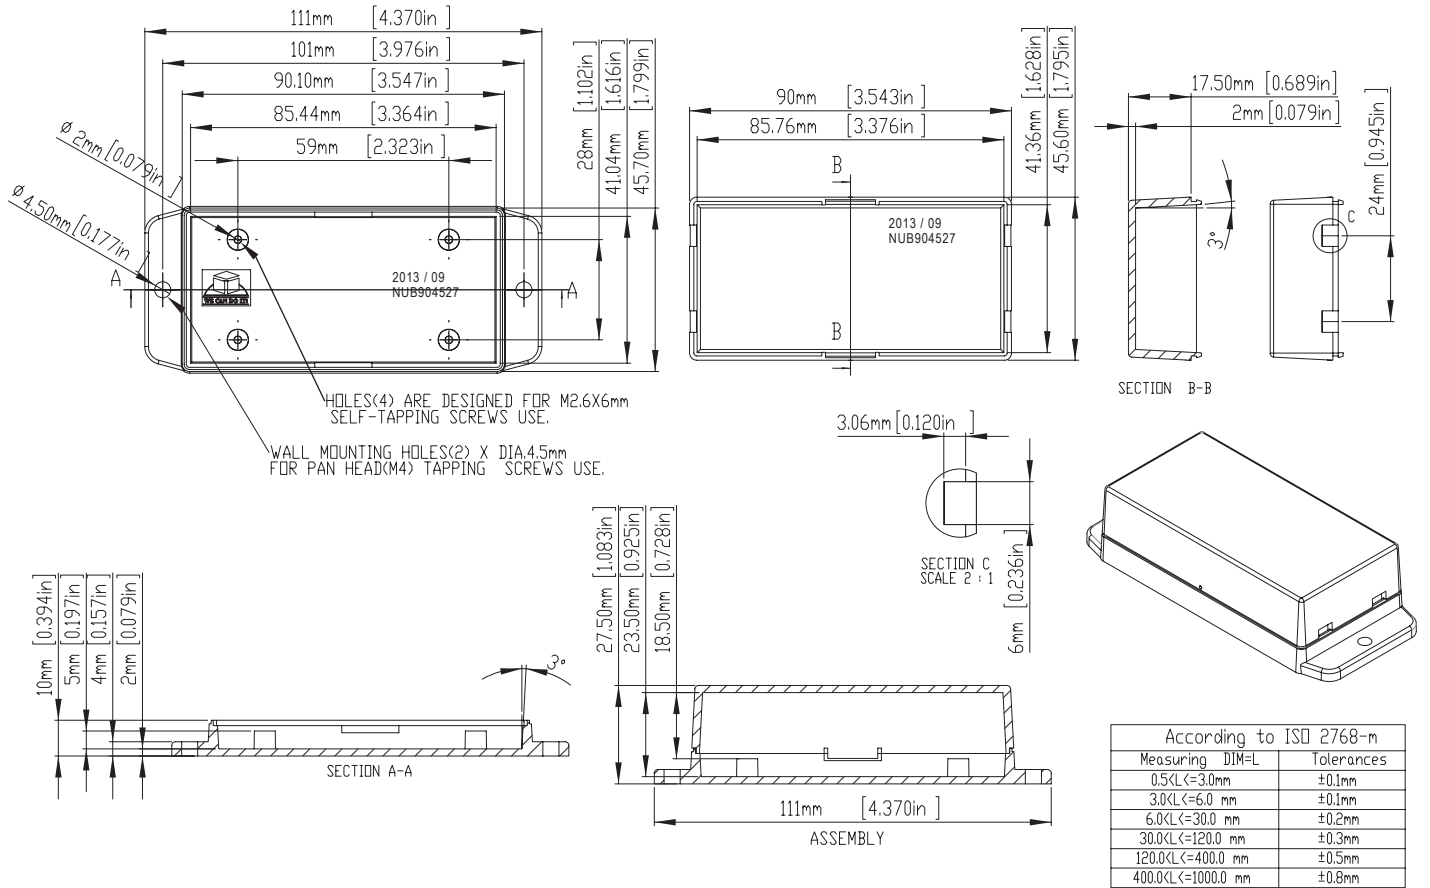

NUB1057020BK/NUB1057020WH/NUB1057020OR/NUB1057020RD

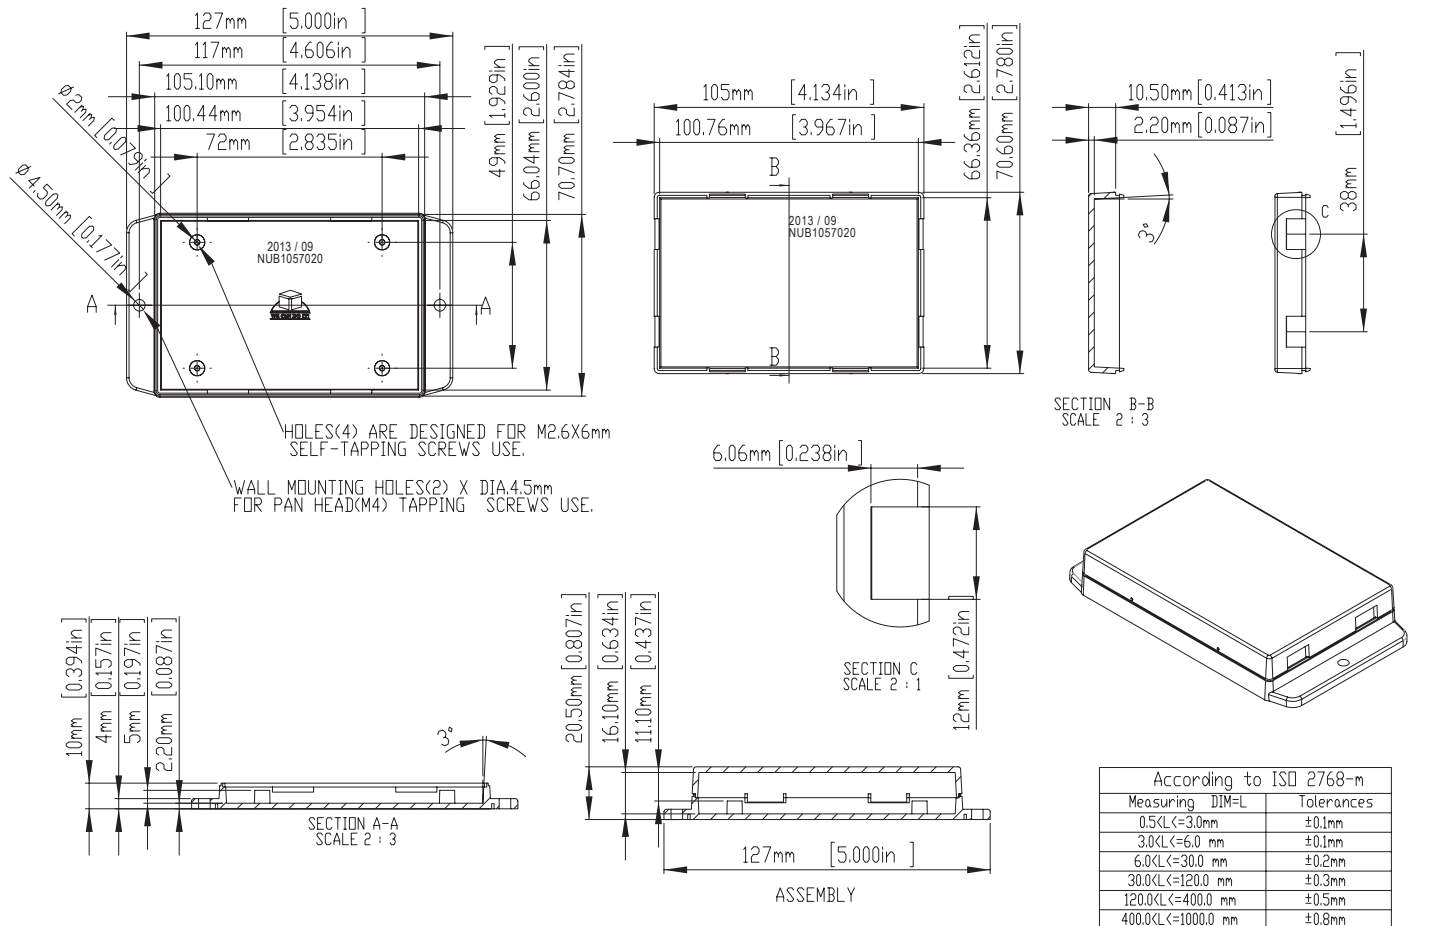

NUB1057035BK/NUB1057035WH/NUB1057035OR/NUB1057035RD

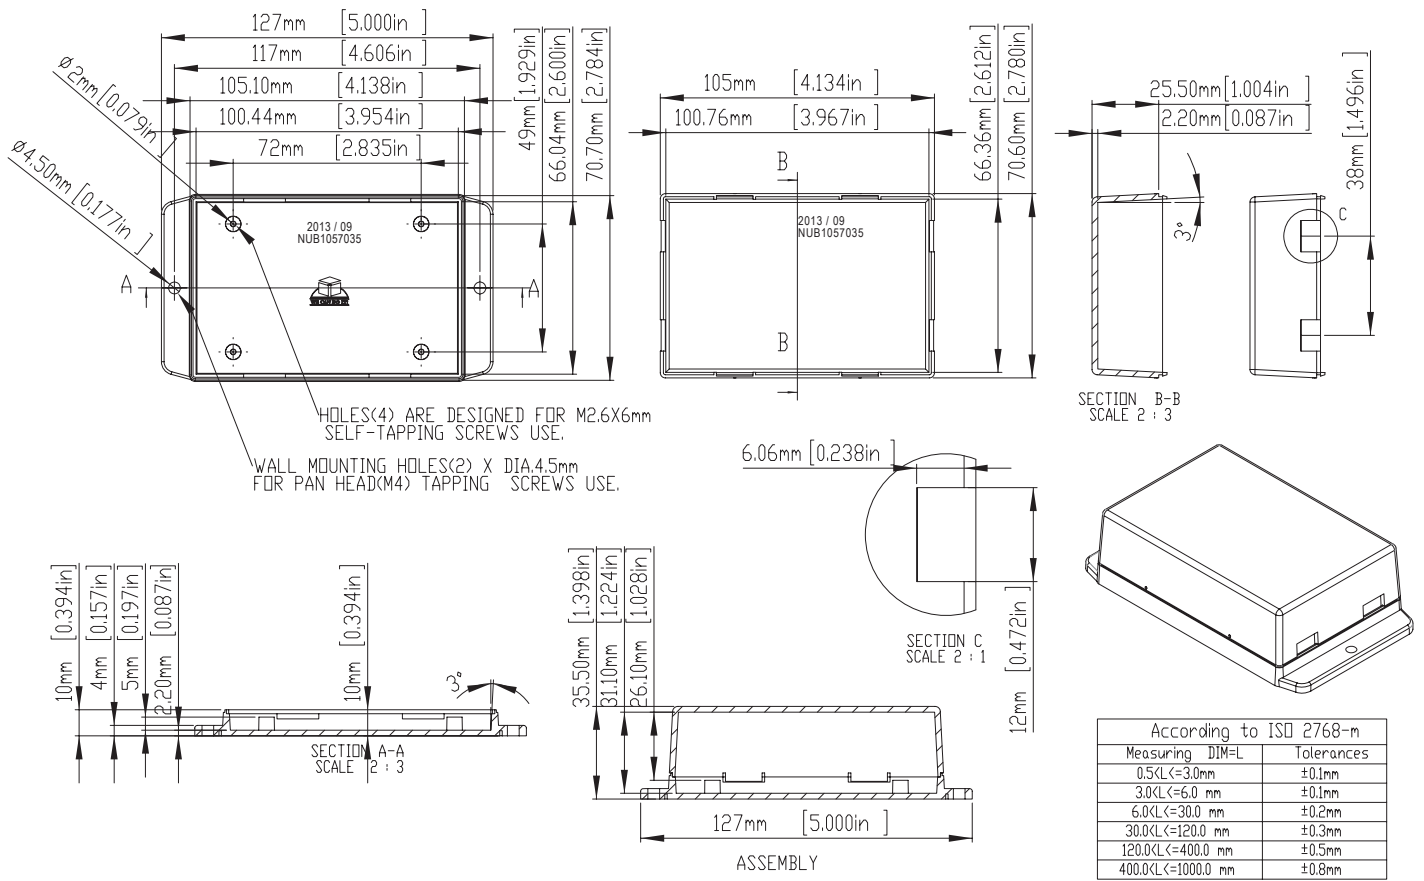

NUB1057050BK/NUB1057050WH/NUB1057050OR/NUB1057050RD

