
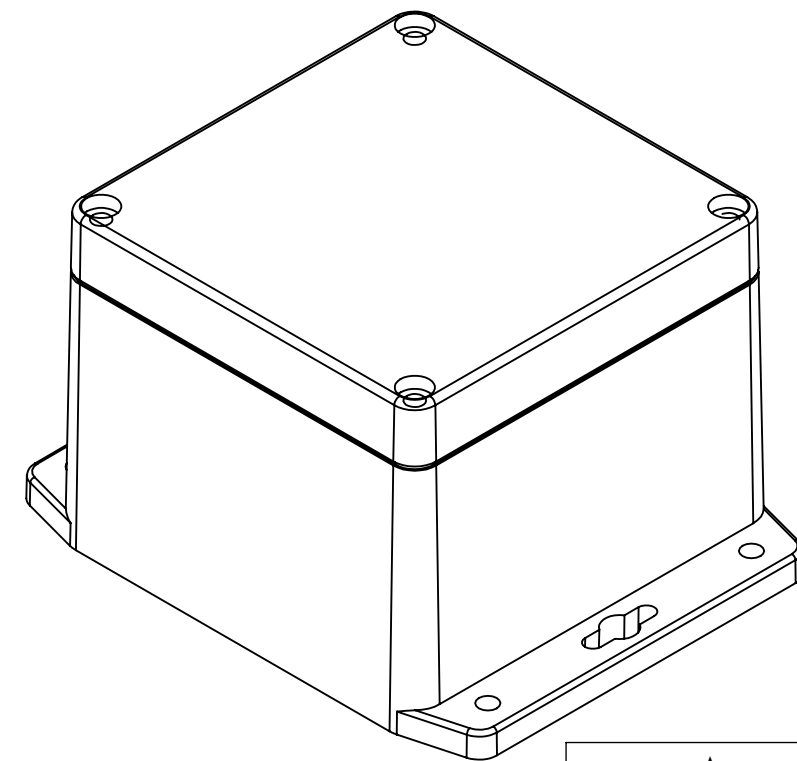
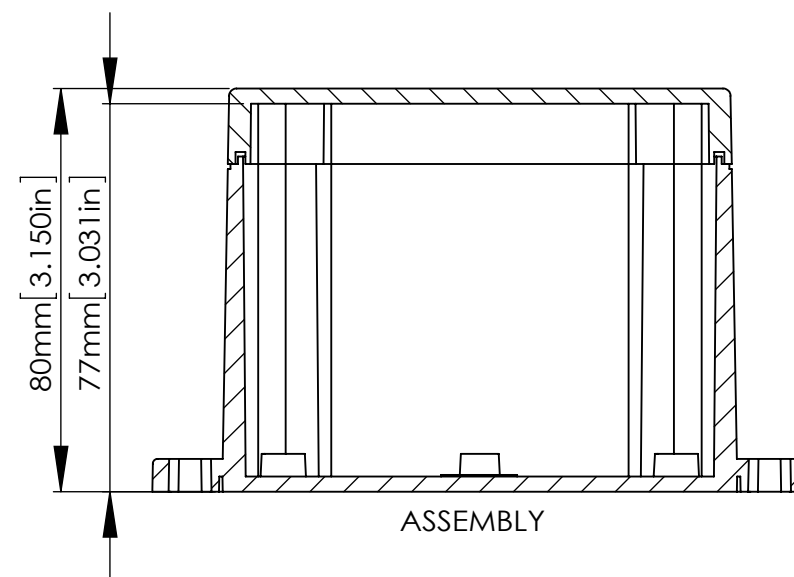
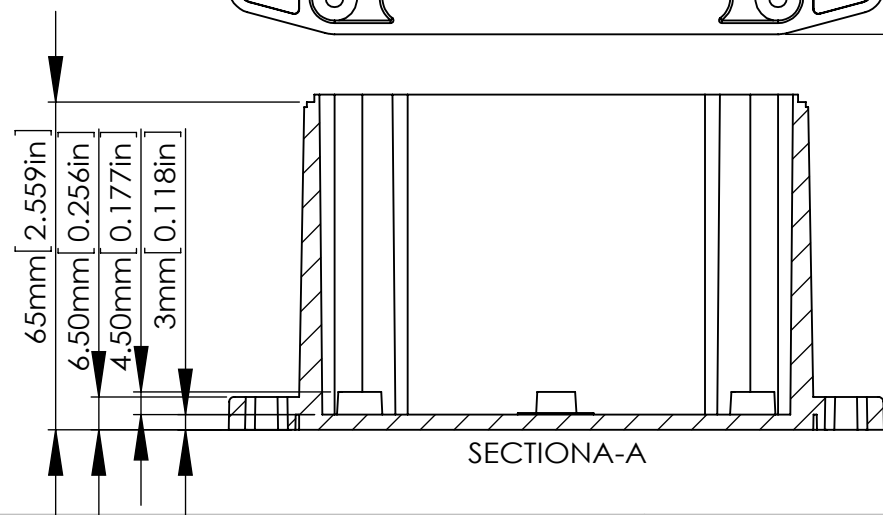
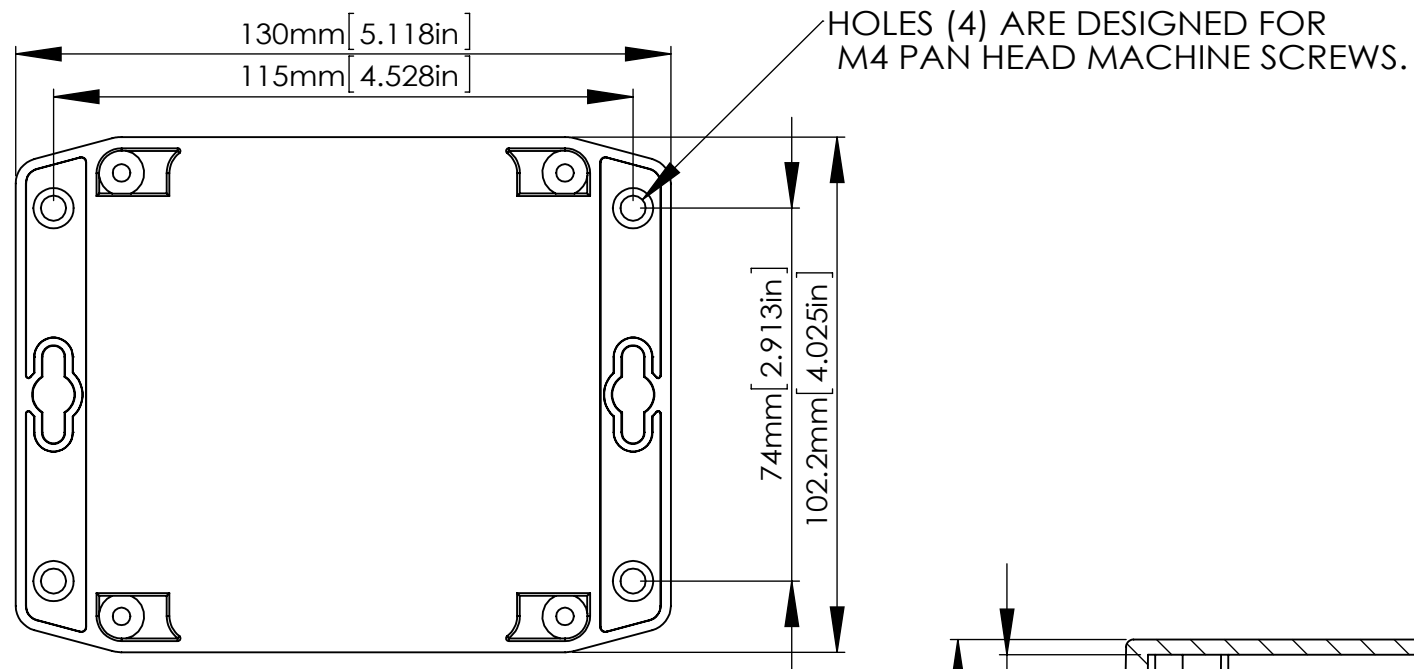
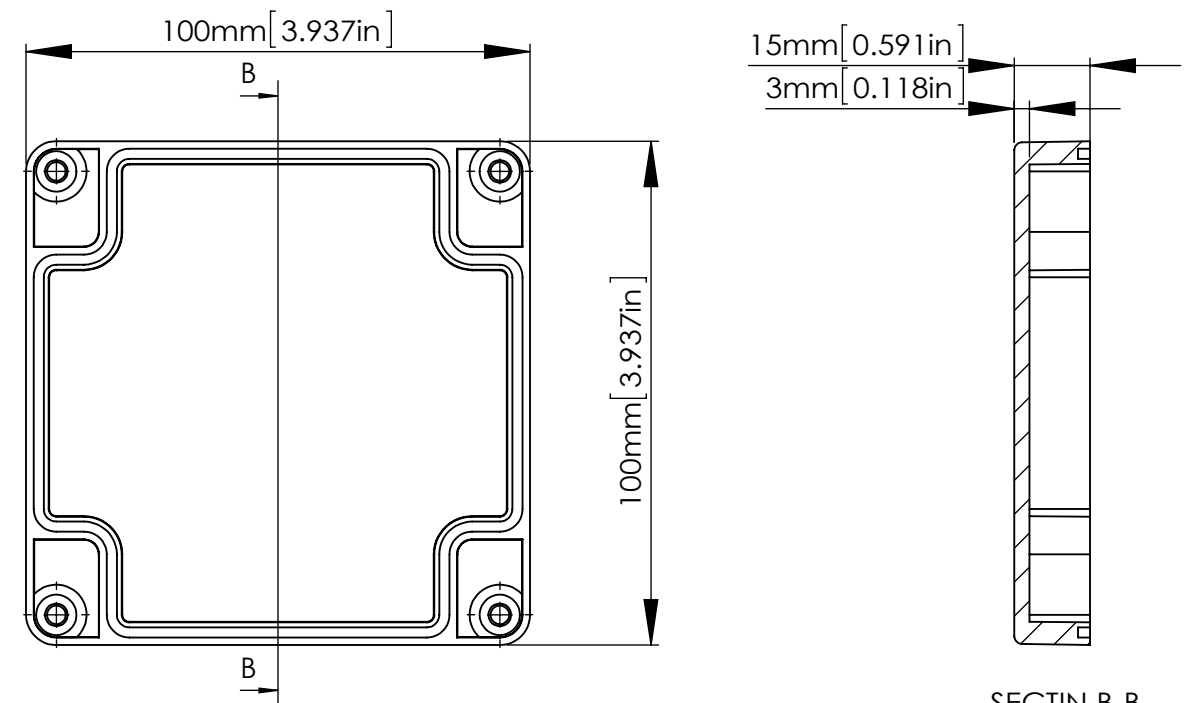


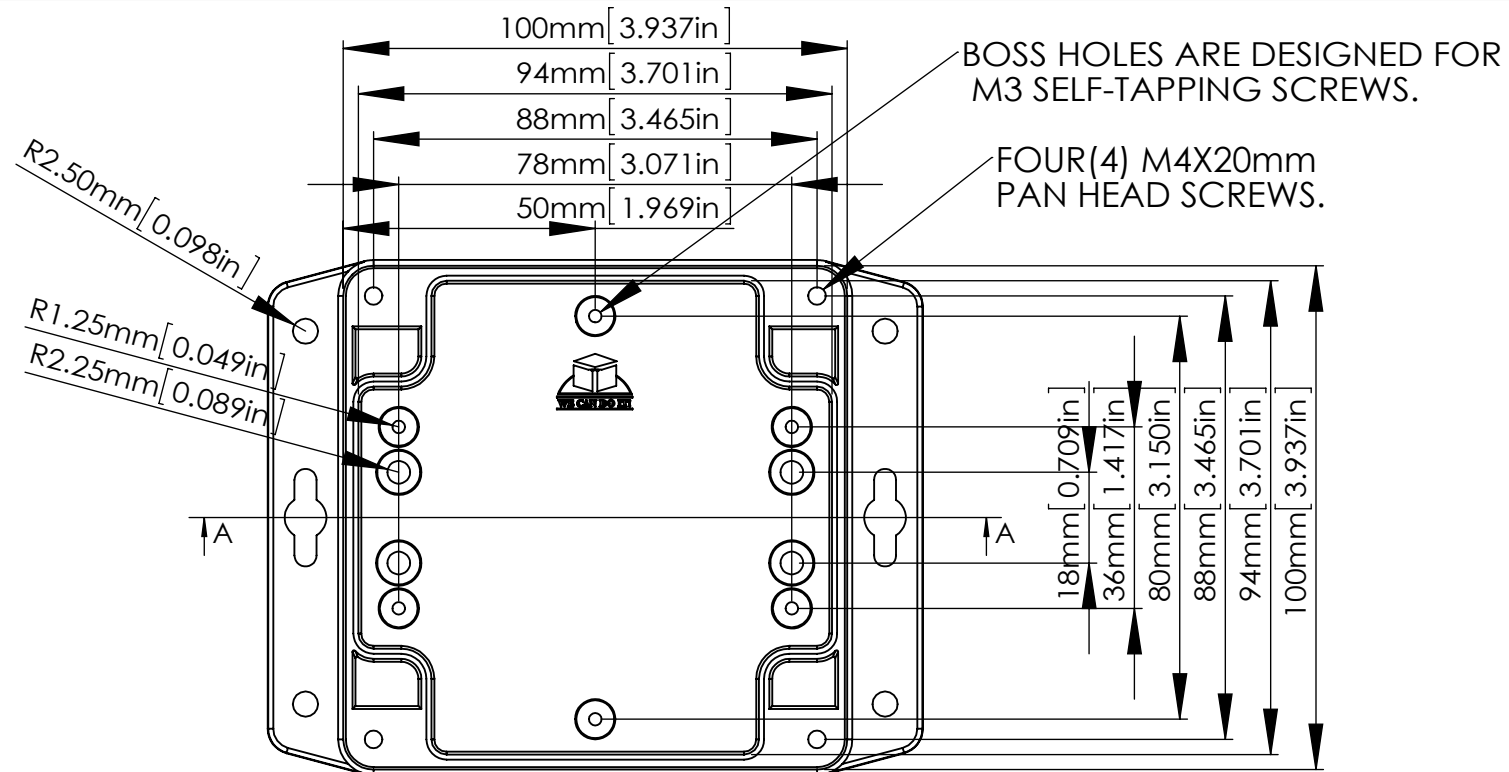

According to ISO 2768-m	
Measuring DIM=L	Tolerances
0.5<L<=3.0mm	±0.1mm
3.0<L<=6.0 mm	±0.1mm
6.0<L<=30.0 mm	±0.2mm
30.0<L<=120.0 mm	±0.3mm
120.0<L<=400.0 mm	±0.5mm
400.0<L<=1000.0 mm	±0.8mm

	MATERIAL	BASE-COLOR	COVER-COLOR
G2103MF	POLYCARBONATE UL94-HB	LIGHT GRAY(RAL 7035)	LIGHT GRAY(RAL 7035)
G2103CMF	POLYCARBONATE UL94-HB	LIGHT GRAY(RAL 7035)	CLEAR
G3104MF	ABS UL94-HB	DARK GRAY(RAL 7000)	DARK GRAY(RAL 7000)

According to ISO 2768-m	
Measuring DIM=L	Tolerances
0.5<L<=3.0mm	±0.1mm
3.0<L<=6.0 mm	±0.1mm
6.0<L<=30.0 mm	±0.2mm
30.0<L<=120.0 mm	±0.3mm
120.0<L<=400.0 mm	±0.5mm
400.0<L<=1000.0 mm	±0.8mm

宣又實業有限公司 GAIN TA INDUSTRIES LTD.	繪圖	DRA'D BY	日期	DATE	材質	MATE.	圖名TITLE:	圖號DWG NO:	版次REVISED:
		JACKY		2026/06/01		PC/ABS	G2103MF;G3104MF		